

XBee-PRO[®] DigiMesh[®] 2.4 Range Extender

Mesh Networking Range Extender

Easy-to-use plug-in router expands the reach of
DigiMesh 2.4 GHz networks.



Overview

Digi's XBee-PRO DigiMesh 2.4 range extender is used to create or expand a wireless DigiMesh network. This easy-to-use network extender acts as a routing node, providing users with expanded network range and adding redundancy to a mesh network.


DigiMesh is an innovative, peer-to-peer networking protocol that increases stability by forming self-healing, self-discovering mesh networks. DigiMesh features dense network operation and support for sleeping routers, extending the operational life of battery dependent networks.

The XBee-PRO DigiMesh 2.4 range extender enables seamless communication between other DigiMesh 2.4 based devices, such as ConnectPort[®] X gateways, XBee[®] adapters, XBee and XBee-PRO wireless modules. By using the iDigi[™] Cloud, users can securely access and manage devices in their DigiMesh network from anywhere in the world.

Related Products



Gateways



Modules



Adapters



Dev Kits




iDigi Solutions



Modems

Application Highlight

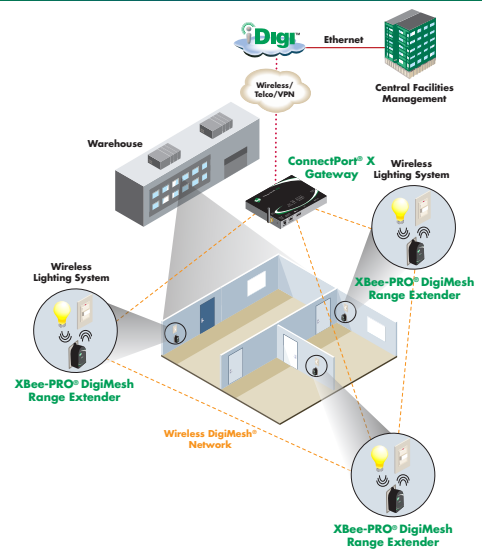

Features/Benefits

- Extends the range and strength of DigiMesh 2.4 GHz wireless networks
- Creates redundant network pathways for more reliable mesh networking
- Plugs into a standard power outlet for easy installation
- Easy-to-use commissioning button provides a simple method for joining an existing DigiMesh 2.4 network
- Secure mounting tab prevents accidental unplugging and theft (North America unit only)
- Small form factor for unobtrusive deployment



Platform

XBee-PRO® DigiMesh® 2.4 GHz Range Extender

Performance

Data Rate	250 Kbps
Indoor/Urban Range	300 ft (90 m); 200 ft (60 m) international variants
Outdoor/RF Line-of-Sight Range	1 mile (1.6 km); 2500 ft (750 m) international variants
Transmit Power	63 mW (+18 dBm); 10 mW (+10 dBm) international variants
Receiver Sensitivity	-100 dBm

Features

Push Button	Device reset, configuration reset to factory defaults, identification/commissioning mode
LEDs	Power: Solid when power is supplied Associate: Blinks when unit is connected and associated to an RF network
Frequency Band	2.4 GHz ISM
Interfaces	Network interoperable with DigiMesh 2.4 devices
Antenna Type	Internal wire antenna
Locking Mechanism	Unit secures to power outlet using center outlet screw (North America only)


General

Power Input	Universal AC input (85VAC to 265VAC)
Dimensions (L x W x H)	2.87 in x 1.97 in x 1.37 in (7.30 cm x 5.00 cm x 3.50 cm)
Weight	2.50 oz (70.87 g)
Operating Temperature	0° C to 70° C (32° F to 158° F)
Relative Humidity	5% to 95% (non-condensing)


Agency Approvals

FCC (USA)	Yes
IC (Canada)	Yes
ETSI (Europe)	Yes, international variants
Telec (Japan)	Yes, international variants
C-TICK (Australia)	Yes


XBee-PRO Range Extender - Top
(North America unit only)



XBee-PRO Range Extender - Side



XBee-PRO Range Extender - Front



Visit www.digi.com for part numbers.

DIGI SERVICE AND SUPPORT - You can purchase with confidence knowing that Digi is here to support you with expert technical support and a strong five-year warranty. www.digi.com/support

Digi International
877-912-3444
952-912-3444
info@digi.com

Digi International
France
+33-1-55-61-98-98
www.digi.fr

Digi International
KK
+81-3-5428-0261
www.digi-intl.co.jp

Digi International
(HK) Limited
+852-2833-1008
www.digi.cn



91001638
A1/910

BUY ONLINE • www.digi.com

© 2010 Digi International Inc. All rights reserved. Digi, Digi International, the Digi logo, the Wireless M2M logo, ConnectPort, DigiMesh, iDigi, XBee and XBee-PRO are trademarks or registered trademarks of Digi International Inc. in the United States and other countries worldwide. All other trademarks are the property of their respective owners. All information provided is subject to change without notice.

