



CONSOLE SERVER FOR
SECURE NETWORK
DEVICE MANAGEMENT



DIGI CM™

Secure, reliable in- and out-of-band management for servers, routers, switches, firewalls and other network equipment

The Digi CM provides secure access to any network device, even when the network is down. Users can monitor and control their devices from anywhere using the corporate TCP/IP network, the Internet or dial-up modem connections. This easy-to-use console management tool is ideal for managing servers, routers, switches and any network device with a serial port.

Automatic Device Recognition auto-configures attached devices and populates the Title page with device details. This feature monitors the ports and sends alerts for disconnected or down devices.

The RemotePorts™ feature enables cost-effective management of up to 48 additional remote devices from a single interface. Additional devices can be managed from the Digi CM using an auxiliary device or terminal server, or from across the network.

The Digi CM, used in conjunction with 3rd party power control devices, offers comprehensive infrastructure management. Users can remotely power on/off connected devices, reboot servers, and receive notifications of changes in power usage, temperature readings, system reboots and more.

BENEFITS

- Sun, Cisco, IBM, HP, UNIX®, Linux® and Microsoft Windows Server® compatible
- TACACS+, RADIUS, LDAP, Kerberos, local user database provide centralized authentication
- SSH v2 ensures secure access
- Secure clustering allows multi-server access via one IP address
- Port buffering/logging for easy troubleshooting
- Straight-through CAT5 cabling for easy, hassle-free server connections
- PC Card slot for increased flash, or additional Ethernet/modem connection
- Email/pager alerts and SNMP traps

RELATED PRODUCTS



Digi Passport®



ConnectPort®
TS





ConnectPort®
LTS



Cables and
Accessories

APPLICATION EXAMPLE

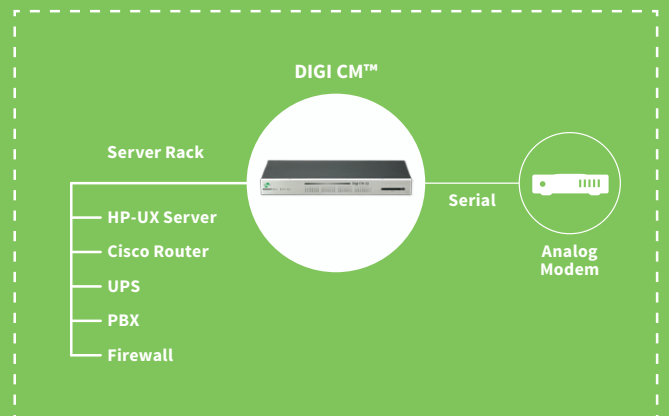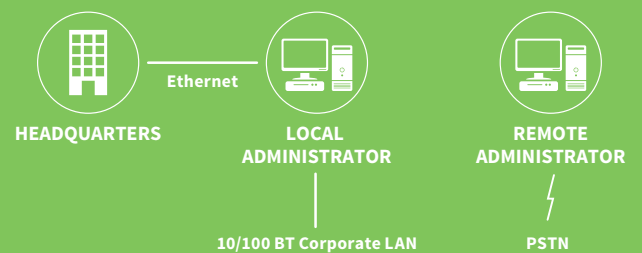

SPECIFICATIONS

Digi CM™ 8

Digi CM™ 16/32

Digi CM™ 48

FEATURES

AUTHENTICATION	TACACS+, RADIUS, LDAP, Kerberos, Local user database		
SECURITY	SSHv2 server and client, SSL, IP filtering, Data capture via port buffering		
MANAGEMENT	Command Line, Web (HTTP/HTTPS), SNMP, Multi-level menuing, Port triggers and alerts		
OPERATING SYSTEMS	Embedded Linux®		
CONNECTIONS	Standard CAT5 cabling for RJ-45 serial ports		
PORT ACCESS	Telnet/SSH with menuing, Reverse Telnet/SSH, HTTP/HTTPS, Multiple users per port, SSH sessions simultaneously on all ports, IP addresses per port		
SUPPORTED PC CARDS	CompactFlash memory card, Wireless LAN adapter (802.11b), Ethernet LAN adapter, PSTN modem card		
RACK MOUNT	19" rack mount kit included with 16/32/48-port models. Optional rack mount kit (76000705) available for purchase with 8-port model.		
MEMORY	64 MB SDRAM, 8 MB Flash	64 MB SDRAM, 8 MB Flash	256 MB SDRAM, 16 MB Flash
DIMENSIONS (L X W X D)	9.50 in x 6.25 in x 1.25 in (24.10 cm x 15.90 cm x 3.20 cm)	17.00 in x 8.50 in x 1.75 in (43.20 cm x 21.60 cm x 4.50 cm)	17.50 in x 10.00 in x 1.75 in (44.50 cm x 25.40 cm x 4.50 cm)
WEIGHT	2.50 lb (1.10 kg)	5.80 lb (2.60 kg)	6.40 lb (2.90 kg)

INTERFACES

SERIAL PORTS	8 RJ-45 RS-232	16 or 32 RJ-45 RS-232	48 RJ-45 RS-232
CONSOLE PORTS	1 RJ-45 RS-232		
ETHERNET PORTS	1 RJ-45 10/100Base-T		
PC CARD SLOT	N/A	One 16-bit PCMCIA	One 16-bit PCMCIA

POWER REQUIREMENTS


POWER SUPPLY	External 100-240 VAC, 50/60 Hz, 12 W max, 6 W typical	Internal 100-240 VAC, 50/60 Hz, 40 W max, 12 W typical	Internal 100-240 VAC, 50/60 Hz, 40 W max, 12 W typical
POWER SUPPLY MTBF	11 years		

ENVIRONMENTAL

OPERATING TEMPERATURE	5° C to 50° C (41° F to 122° F)
STORAGE TEMPERATURE	-30° C to +60° C (-20° F to +140° F)

REGULATORY APPROVALS

SAFETY	UL 1950, EN60950
EMISSIONS/IMMUNITY	CE, FCC Part 15 (Class A), EN55024, EN55022 (Class A)



- PIN SIGNAL**
- 1 CTS
 - 2 DSR
 - 3 RxD
 - 4 SAFETY GND
 - 5 DCD
 - 6 TxD
 - 7 DTR
 - 8 RTS

Microsoft®
CERTIFIED
 Partner



PART NUMBERS	DESCRIPTION
70001931	Digi CM 8
70001910	Digi CM 16
70001908	Digi CM 32
70001949	Digi CM 48
70001951	Digi CM 48 - Dual AC

FOR MORE INFORMATION
PLEASE VISIT WWW.DIGI.COM

DIGI SERVICE AND SUPPORT / You can purchase with confidence knowing that Digi is always available to serve you with expert technical support and our industry leading warranty. For detailed information visit www.digi.com/support.

© 1996-2020 Digi International Inc. All rights reserved.
All trademarks are the property of their respective owners.

91001409
B5/620

DIGI INTERNATIONAL WORLDWIDE HQ
877-912-3444 / 952-912-3444 / www.digi.com

DIGI INTERNATIONAL GERMANY
+49-89-540-428-0

DIGI INTERNATIONAL JAPAN
+81-3-5428-0261 / www.digi-intl.co.jp

DIGI INTERNATIONAL SINGAPORE
+65-6213-5380

DIGI INTERNATIONAL CHINA
+86-21-50492199 / www.digi.com.cn

