




COMMUNICATIONS AND CONTROL PROCESSOR

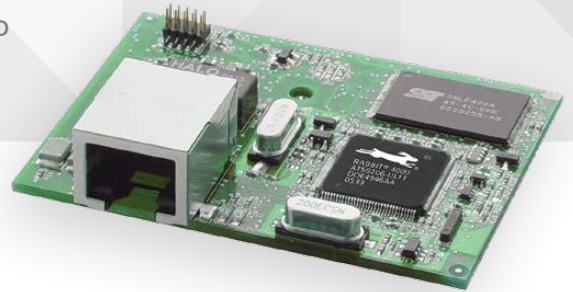

# RABBITCORE® RCM4000 SERIES

A powerful embedded Ethernet control device with the intelligence and Internet connectivity needed for remote monitoring and control of your devices

The RCM4000 series is designed to mount directly to a user-supplied motherboard and acts as the microprocessor of the embedded system. The microprocessor features 28 GPIO lines shared with up to five serial ports and four levels of alternate pin functions that include variable phase PWM, quadrature decoder and input capture.

The RCM4000 series, with its robust feature set, ample memory, 10Base-T Ethernet and analog, is ready for network

connectivity and I/O control for true device Internet communication and control. Evaluation of the RCM4000 is easy with the RCM4000 development kit.

## BENEFITS

- Rabbit 4000 running at 59 MHz
- Up to 1 MB (16-bit) Program Flash, 1 MB (16-bit) SRAM, 32 MB of Flash memory
- 10Base-T Ethernet (RJ-45 connector), up to 28 GPIO, up to 5 serial ports
- 8 channels 12-bit A/D converter
- Web server capability and remote device control
- Low-cost and easily deployable platform for non-critical embedded security
- Security-key feature with "tamper detect" and encryption capabilities

## RELATED PRODUCTS



RabbitCore® RCM4100 Series



RabbitCore® RCM4200 Series



Rabbit® SBC BL4S200 Series



RabbitCore® RCM4300 Series



Dynamic C®

## APPLICATION EXAMPLE



COMPUTER TERMINAL

Ethernet



JUNCTION BOX WHERE RCM400 RESIDES

## BUILDING SECURITY

RABBITCORE® RCM4000



RS-232



Door Sensor



Camera



Door Sensor

<b>SPECIFICATIONS</b>	<b>RCM4000</b>	<b>  RCM4010</b>
-----------------------	----------------	------------------

FEATURES		
<b>MICROPROCESSOR</b>	Rabbit® 4000 at 59 MHz	
<b>EMI REDUCTION</b>	Spectrum spreader for reduced EMI (radiated emissions)	
<b>ETHERNET PORT</b>	10Base-T, RJ-45, 2 LEDs	
<b>SRAM (16-BIT)</b>	512K	
<b>FLASH MEMORY (16-BIT) (PROGRAM)</b>	512K	
<b>SERIAL MEMORY (DATA) (NAND FLASH)</b>	32 MB (NAND flash)	—
<b>BACKUP BATTERY</b>	Connection for user-supplied backup battery (to support RTC and data SRAM)	
<b>GENERAL PURPOSE I/O</b>	22 parallel digital I/O lines: Configurable with 4 layers of alternate functions	28 parallel digital I/O lines: Configurable with 4 layers of alternate functions
<b>ADDITIONAL INPUTS</b>	2 startup mode, reset in, CONVERT	2 startup mode, reset in
<b>ADDITIONAL OUTPUTS</b>	Status, reset out, analog VREF	Status, reset out
<b>ANALOG INPUTS</b>	8 channels single-ended or 4 channels differential programmable gain 1, 2, 4, 5, 8, 10, 16 and 20 V/V	—
<b>A/D CONVERTER RESOLUTION</b>	12 bits (11 bits single-ended)	—
<b>A/D CONVERSION TIME (INCLUDING 120 MS RAW COUNTED AND DYNAMIC C<sup>®</sup>)</b>	180 µs	—
<b>AUXILIARY I/O BUS</b>	8 data lines and 6 address lines (shared with parallel I/O lines), plus I/O read/write	
<b>SERIAL PORTS</b>	4 shared high-speed, CMOS-compatible ports: All 4 configurable as asynchronous (with IrDA) or as clocked serial (SPI) 1 asynchronous clocked serial port shared with programming port 1 clocked serial port shared with A/D converter	5 shared high-speed, CMOS-compatible ports: All 5 configurable as asynchronous (with IrDA), 4 as clocked serial (SPI), and 1 as SDLC/HDLC 1 asynchronous clocked serial port shared with programming port
<b>SERIAL RATE</b>	Maximum asynchronous baud rate = CLK/8	
<b>SLAVE INTERFACE</b>	Slave port allows the RCM4000 to be used as an intelligent peripheral device slaved to a master processor	
<b>REAL TIME CLOCK</b>	Yes	
<b>TIMERS</b>	Ten 8-bit timers (6 cascadable from the first), one 10-bit timer with 2 match registers, and one 16-bit timer with 4 outputs and 8 set/reset registers	
<b>WATCHDOG/SUPERVISOR</b>	Yes	
<b>PULSE-WIDTH MODULATORS</b>	—	2 channels: Synchronized PWM with 10-bit counter Variable-phase synchronized PWM with 16-bit counter
<b>QUADRATURE DECODER</b>	—	2-channel quadrature decoder accepts inputs from external incremental encoder modules
<b>POWER</b>	3.0– 3.6 VDC, 90 mA @ 3.3V (preliminary, pins unloaded)	
<b>OPERATING TEMPERATURE</b>	0° C to +70° C	
<b>HUMIDITY</b>	5% to 95%, non-condensing	
<b>CONNECTORS</b>	Programming header	
<b>BOARD SIZE</b>	1.84" × 2.42" × 0.77" (47 mm × 61 mm × 20 mm)	

PART NUMBERS	DESCRIPTION
20-101-1094	RCM4000
20-101-1112	RCM4010

**DIGI SERVICE AND SUPPORT** / You can purchase with confidence knowing that Digi is always available to serve you with expert technical support and our industry leading warranty. For detailed information visit [www.digi.com/support](http://www.digi.com/support).

© 1996-2017 Digi International Inc. All rights reserved.  
All trademarks are the property of their respective owners.

91001547  
C3/717

**DIGI INTERNATIONAL WORLDWIDE HQ**  
877-912-3444 / 952-912-3444 / [www.digi.com](http://www.digi.com)

**DIGI INTERNATIONAL GERMANY**  
+49-89-540-428-0

**DIGI INTERNATIONAL JAPAN**  
+81-3-5428-0261 / [www.digi-intl.co.jp](http://www.digi-intl.co.jp)

**DIGI INTERNATIONAL SINGAPORE**  
+65-6213-5380

**DIGI INTERNATIONAL CHINA**  
+86-21-50492199 / [www.digi.com.cn](http://www.digi.com.cn)

