




MULTI-PORT  
SERIAL CARDS

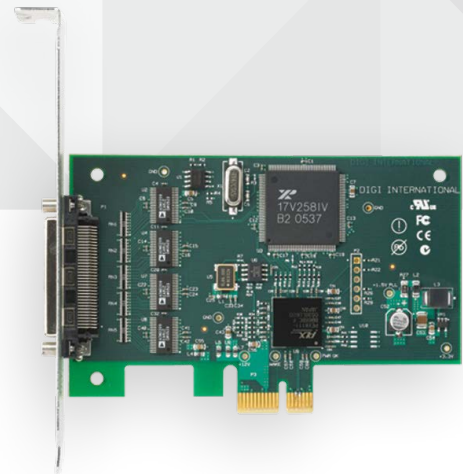

# DIGI NEO®

Flexible serial cards deliver reliable, cost-effective and high performance serial port expansion in one of the smallest form factors available

Digi Neo multiport serial cards are designed for reliable serial port expansion in tight workspaces and specialized server/PC environments. They are ideal for point-of-sale, industrial automation, factory control, kiosks and data collection applications.


Leveraging an Application Specific Integrated Circuit (ASIC), Digi Neo delivers up to 921.6 Kbps of throughput. This PCIe compatible card offers on-board surge suppression on each signal, protecting system operation from electrical interference. Additional features include large buffers for data transfer, low latency and baud rate customization.

These low-cost serial cards have one of the smallest form factors available and are one of the only low profile eight-port cards on the market. An extensive range of cabling and software driver options makes Digi Neo a flexible and easy-to-install solution. Enhanced software monitoring and diagnostic tools ensure proper installation and serial port performance.


## BENEFITS

- 4 or 8 RS-232 serial ports
- Low Profile and Standard Profile supported
- PCI Express slot support
- Flexible cabling and connector options
- Surge suppression on all signals protects against electrical interference with system operation
- Low latency for reliable performance
- Windows® and Linux® driver support
- Throughput up to 921.6 Kbps

## APPLICATION EXAMPLE

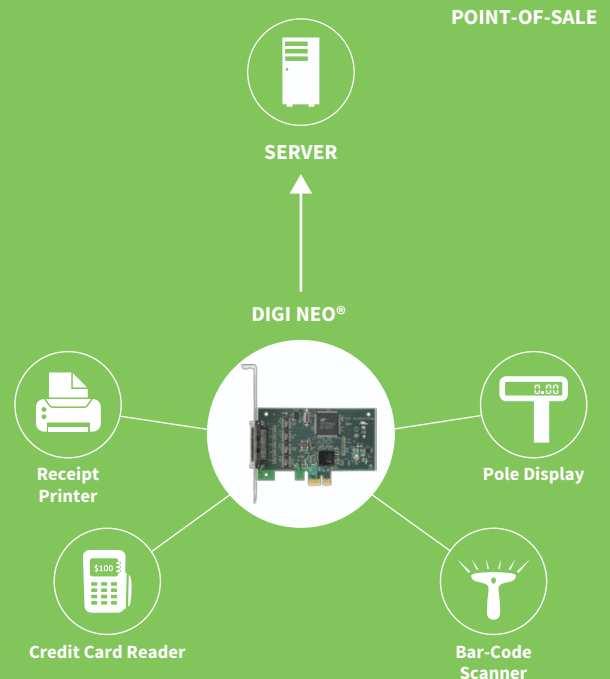

## RELATED PRODUCTS

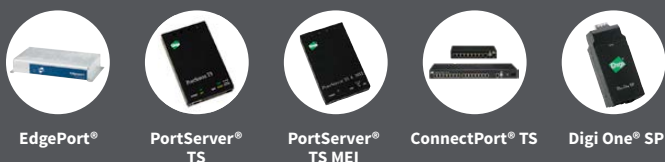

## SPECIFICATIONS

## Digi Neo® 4- or 8-Port

<b>BUS INTERFACE</b>	
<b>PLATFORM</b>	PCI Express (PCIe)
<b>PCI SLOT</b>	PCI Express x1, x2, x4, x8, x12, x16 lane compatible
<b>LOW PROFILE PCI</b>	Yes - Low profile bracket included
<b>INTERFACES</b>	
<b>SERIAL PORTS</b>	4 or 8 RS-232
<b>SERIAL CONNECTOR</b>	DB-25, 4' DB-9 fan-out cables; DB-9, RJ-45 connector boxes with 6' captive cable
<b>THROUGHPUT</b>	Up to 921.6 Kbps
<b>FEATURES</b>	
<b>OPERATING SYSTEMS</b>	Windows 10®, Windows® 8, Windows® 7, Windows Server 2016, Windows Server® 2012, Windows Vista®, Windows Server® 2003, Windows Server® 2008, Windows® XP, Linux®
<b>DIMENSIONS (L X W X H)</b>	4.72 in x 0.72 in x 2.45 in (11.99 cm x 1.84 cm x 6.22 cm)
<b>WEIGHT</b>	2.00 oz (57.00 g)
<b>OTHER</b>	Full modem control, Hardware or software flow control, Low latency, Custom baud rates
<b>POWER REQUIREMENTS</b>	
<b>TYPICAL (+5V)</b>	20 mA
<b>MAXIMUM (+5V)</b>	100 mA
<b>TYPICAL (+12V)</b>	100 mA
<b>MAXIMUM (+12V)</b>	150 mA
<b>SURGE PROTECTION</b>	15 kV surge protection on all signals
<b>ENVIRONMENTAL</b>	
<b>OPERATING TEMPERATURE</b>	0° C to 55° C (32° F to 131° F)
<b>STORAGE TEMPERATURE</b>	-25° C to +85° C (-13° F to +185° F)
<b>RELATIVE HUMIDITY</b>	5% to 90% (non-condensing)
<b>ALTITUDE</b>	0 to 12,000 feet (0 to 3,660 meters)
<b>REGULATORY APPROVALS</b>	
<b>SAFETY</b>	UL 1950, CSA 22.2 No. 950, EN60950, AS3260
<b>EMISSIONS/IMMUNITY</b>	FCC Part 15 (Class B), EN55022 (Class B), EN55024, ICES 003 (Class B), AS3548, VCCI (Class B)

## PART NUMBERS

## DESCRIPTION

77000889	Digi Neo PCI Express 8-port w/o cable (low profile bracket included)
77000890	Digi Neo PCI Express 4-port w/o cable (low profile bracket included)
<b>CABLES</b>	
76000523	8-port DTE DB-25M fan-out cable
76000527	8-port DTE RJ-45 connector box
76000529	8-port DTE DB-9M fan-out cable
76000534	HD-68M to DB-78F legacy cable converter
76000561	8-port DTE DB-9M connector box

**DIGI SERVICE AND SUPPORT** / You can purchase with confidence knowing that Digi is always available to serve you with expert technical support and our industry leading warranty. For detailed information visit [www.digi.com/support](http://www.digi.com/support).

© 1996-2018 Digi International Inc. All rights reserved.  
All trademarks are the property of their respective owners.

91001079  
J4/418

**DIGI INTERNATIONAL WORLDWIDE HQ**  
877-912-3444 / 952-912-3444 / [www.digi.com](http://www.digi.com)

**DIGI INTERNATIONAL GERMANY**  
+49-89-540-428-0

**DIGI INTERNATIONAL JAPAN**  
+81-3-5428-0261 / [www.digi-intl.co.jp](http://www.digi-intl.co.jp)

**DIGI INTERNATIONAL SINGAPORE**  
+65-6213-5380

**DIGI INTERNATIONAL CHINA**  
+86-21-50492199 / [www.digi.com.cn](http://www.digi.com.cn)

