


1 Identify Contents



The information listed below is meant to help aid you in identifying the accessories included in your box. If any item is missing or damaged, please contact your supplier. Also, make a record of any damage that may have occurred during shipping and report it to the carrier.

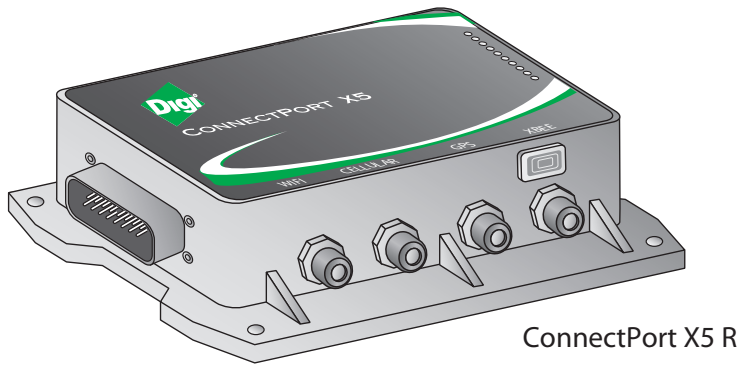


Quick Start Guide


ConnectPort™ X5 R GPRS Development Kit

90002138_B



a Identify Wiring Harness

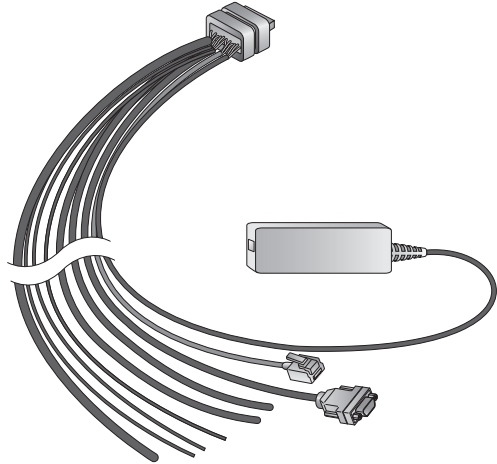

b Identify Antennas

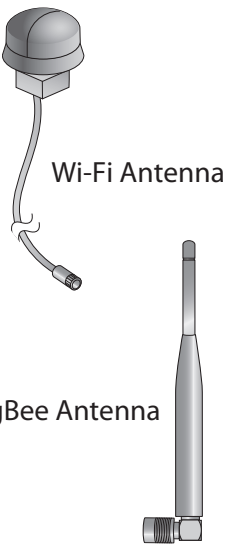

c Identify Power Cord

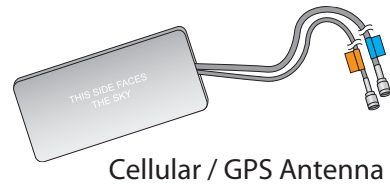


2 Insert SIM Card

a Remove the SIM Card Cover and insert SIM card(s) as shown.

b Reattach the SIM Card Cover.

NOTE: The metal contacts on the SIM card should be facing down, and the chamfered edge should be inserted first.

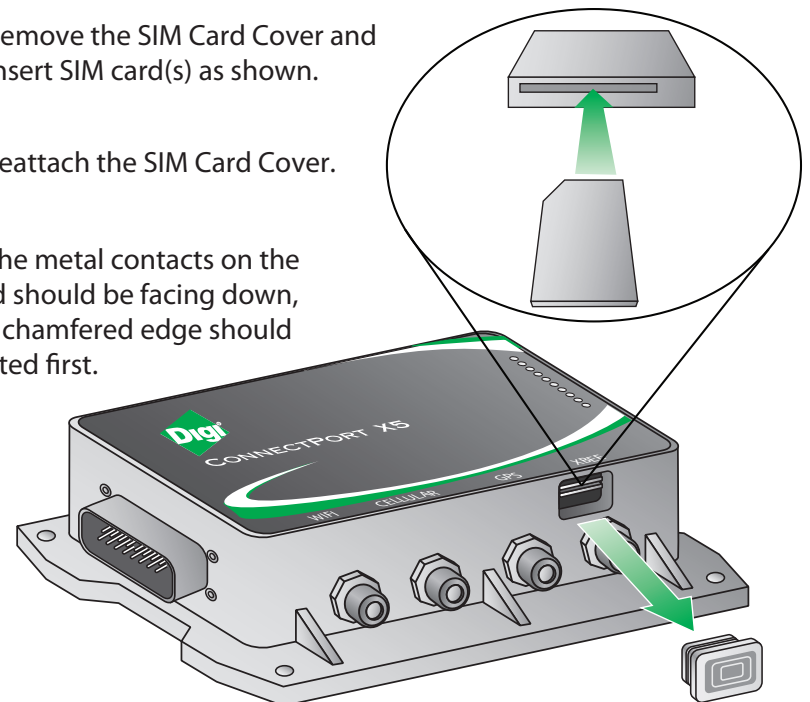

NOTE: A SIM card is not included in the kit. A SIM card must be supplied and activated by a Cellular Service Provider for device operation.

3 Connect Hardware


a Connect the antennas to the device.

b Connect the Wiring Harness to the device.

c Connect the Ethernet Cable to a PC.

d Plug the Power Supply into a wall outlet using the Power Cord.

NOTE: On power up, the Power LED will illuminate. Also, the Status LED will blink three times to indicate the initialization of the operating system.

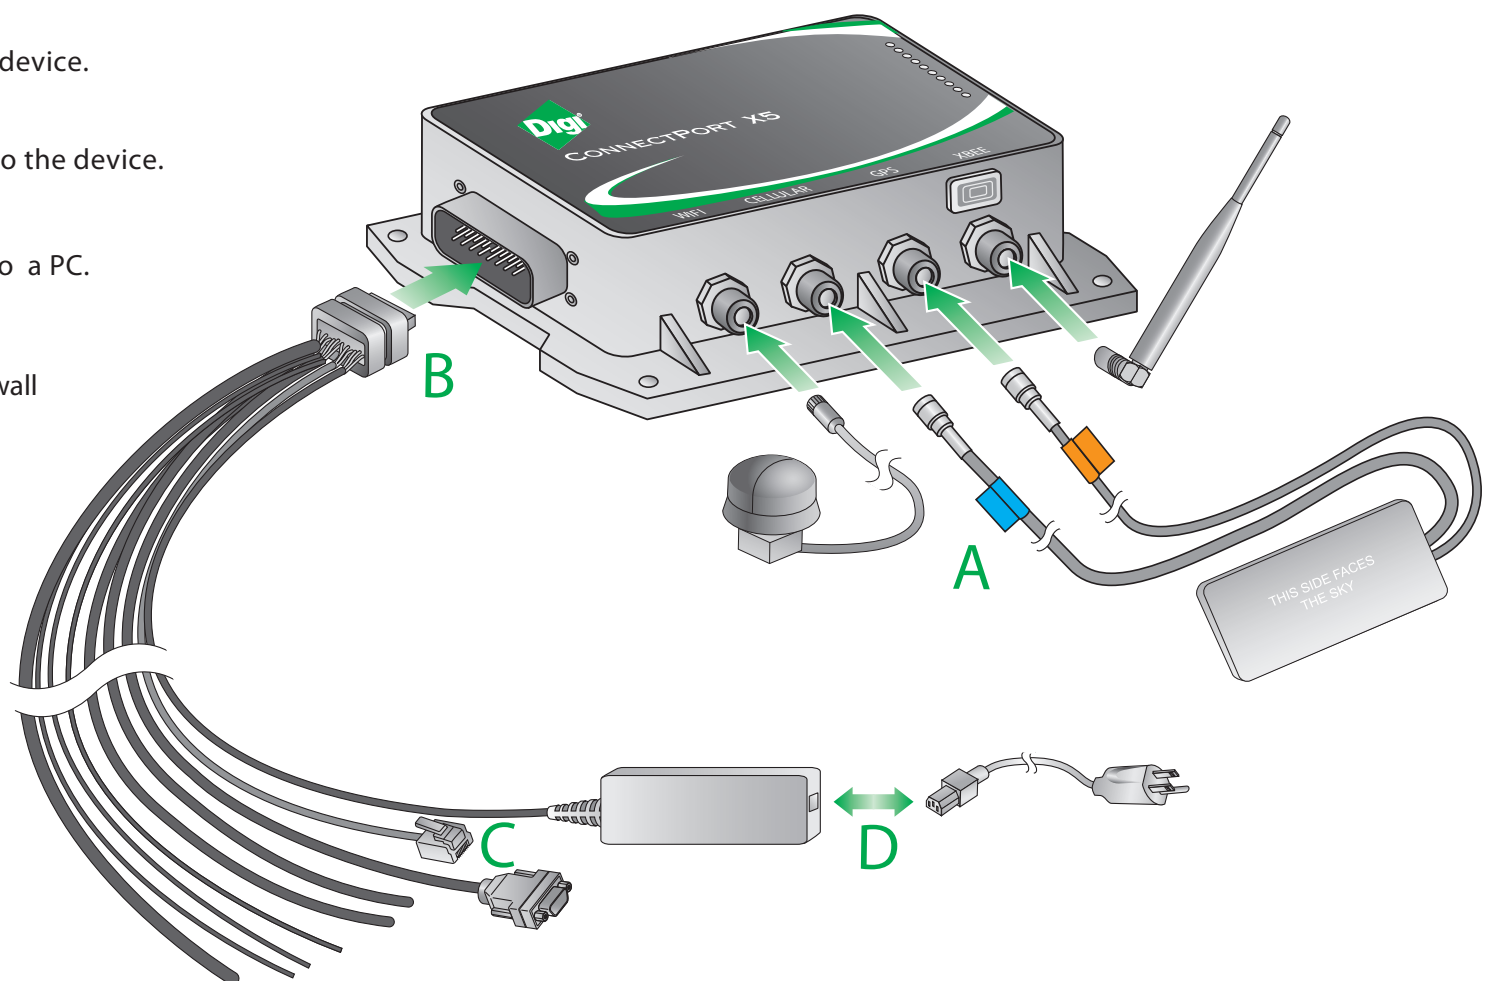

What's Next?

Once you have verified the contents of your box and connected all hardware, please refer to the ConnectPort X5 R Family Getting Started Guide which can be found at www.digi.com/connectportx5.