



CUSTOMIZABLE  
COMMERCIAL-GRADE  
CELLULAR GATEWAYS



# CONNECTPORT® X4 FAMILY

Remote M2M networking gateways designed for commercial grade and rugged outdoor applications

ConnectPort X4 customizable cellular M2M gateways offer a variety of LAN/WAN interface options for end-to-end networking of remote devices. The gateways include comprehensive IP protocols and IPSec VPN support for high-end routing and security. The easy DIA/Python development environment enables custom applications to run locally while interfacing across cellular networks for WAN connectivity to a centralized server.

ConnectPort X4 gateways feature a compact commercial grade enclosure or an optional outdoors IP66/NEMA 4X enclosure. Interface options include Ethernet, serial and ZigBee/RF for


flexible connectivity to virtually any remote device.

All ConnectPort X4 gateways feature an end-to-end development environment using comprehensive Digi ESP™ IDE and DIA/Python programming languages. Digi Remote Manager® add secure, scalable cloud based management and web services integration for a complete remote asset platform.

## BENEFITS

- WAN connectivity via LTE or 3G HSPA+ Networks
- Local wireless connectivity through Zigbee/802.15.4
- Local wired connectivity through RS-232/422/485, 2 Analog inputs and 2 Digital Inputs
- Small commercial grade enclosure or NEMA 4X/IP66 case
- Full routing/IP filtering plus IPsec/SSL VPNs with DES, 3DES or AES encryption
- Easy development environment via DIA and Python scripting as part of Digi ESP IDE
- Support for Modbus/Modbus TCP
- Digi Remote Manager® support for secure, scalable access to an unlimited number of remote assets

## APPLICATION EXAMPLE

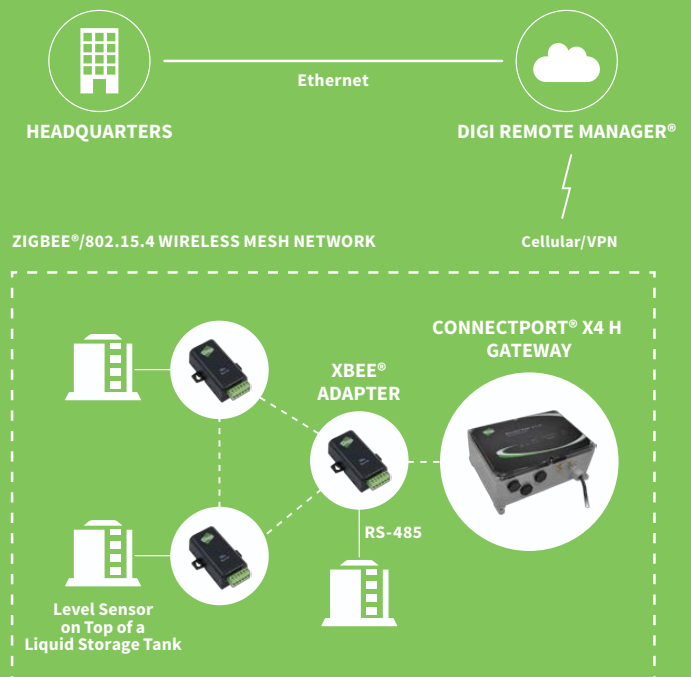

## RELATED PRODUCTS



Digi TransPort®  
WR21



Digi TransPort®  
WR31



Digi Connect®  
Sensor



Digi Connect®  
Tank



Digi Remote  
Manager®

## SPECIFICATIONS

ConnectPort® X4

| ConnectPort® X4 IA

| ConnectPort® X4 H

## WIRELESS INTERFACES

## WWAN\*\*

LTE CAT 1	N/A	N/A	Verizon: Bands 2,4,14 AT&T & T-Mobile: Bands 2,4,5 with 3G/2G Fallback
HSPA+ (U9)	850/900/1700 (AWS)/1900/2100 MHz; Transfer rate (max): 5.76 Mbps up, 21 Mbps down		
CDMA 1XRTT (BX)	800/1900 MHz; Transfer rate (max): 153 Kbps up/down		
CONNECTOR	1 or 2 x SMA (Center pin - on device: female; on antenna: male)		1 or 2 x SMA (Center pin - on device: female; on antenna: male)
SIM SLOTS	2 or 0 (CDMA variants)		1
SIM SECURITY	SIM slot cover plate		Internal SIM slot

## RF

STANDARD	ZigBee (2.4 GHz), DigiMesh® (2.4 GHz or 900 MHz), Digi XBee-PRO® 900HP, 802.15.4 or 868		
CONNECTOR	1 x RP-SMA (Center pin - on device: male; on antenna: female)		

## WIRED INTERFACES

## SERIAL

PORTS	1		
STANDARD	RS-232	RS-232/422/485 (Software selectable)	
DTE/DCE	DTE		
SIGNAL SUPPORT	TXD, RXD, RTS, CTS, DTR, DSR and DCD		
FLOW CONTROL	Hardware and software flow control		
COM PORT REDIRECTOR	RealPort®		
THROUGHPUT	Up to 230 Kbps		
CONNECTOR	DB-9 Male		Screw-down terminal block

## ETHERNET

PORTS	1		
STANDARD	IEEE 802.3		
PHYSICAL LAYER	10/100Base-T		
DATA RATE	10/100 Mbps (auto-sensing)		
MODE	Full or Half duplex (auto-sensing)		
INTERFACE	Auto MDI/MDIX		
CONNECTOR	RJ-45		

## I/O

PORTS	N/A	2 analog and 2 digital	
CONNECTOR	N/A	Screw-down terminal block	

## USB

PORTS	1		
STANDARD	USB 1.1		
SIGNALING	Full-speed		
CONNECTOR	Type A		

## SOFTWARE/MANAGEMENT

MANAGEMENT (CLOUD-BASED)	Digi Remote Manager®		
MANAGEMENT (LOCAL)	Web Interface via HTTP/HTTPS, Password access control, IP service port control; CLI via serial port, Telnet, Python scripting; Digi SureLink™ "always-on" connection		
SECURITY	SSL tunnels, SSHv2, FIPS 197 (IPsec, HTTPS)		

## SPECIFICATIONS

ConnectPort® X4

| ConnectPort® X4 IA

| ConnectPort® X4 H

## SOFTWARE/MANAGEMENT (CONTINUED)

<b>NETWORK PROTOCOLS</b>	UDP/TCP, DHCP, SNMPv1/v2
<b>VPN</b>	IPsec with IKE/ISAKMP; Multiple tunnel support; DES, 3DES and up to 256-bit AES encryption; VPN pass-through, GRE forwarding; Simple Certificate Enrollment Protocol (SCEP) for X.509 certificate
<b>ROUTING</b>	NAT, NAT-T (NAT traversal) VPN tunneling, Port forwarding, VPN/GRE pass-through; Access control lists (IP filtering), IP pass-through, Virtual Router Redundancy Protocol (VRRP) per RFC 3768
<b>INDUSTRIAL PROTOCOL SUPPORT</b>	Modbus bridge enables Modbus serial to Modbus/TCP conversion; Integrated Python code allows gateway to act as Modbus client/master or Modbus server/slave; Functions like an Ethernet to serial bridge, but uses Digi XBee to transport serial data; Handles unique timing issues per Modbus protocol rules; Uses Modbus Unit ID to look up IP or mesh MAC address.
<b>REAL-TIME CLOCK</b>	Yes
<b>MEMORY</b>	16 MB Flash, 32 MB RAM

## POWER

<b>INPUT</b>	6-30 VDC	100-240 VAC	
<b>CONSUMPTION</b>	Idle: 1.5 W, Max: 10.4 W	Approx. 15 W	
<b>PROTECTION</b>	4 kV burst (EFT) per-4-4, 2 kV surge per EN61000-4	2 kV burst (EFT) (with included power supply)	
<b>CONNECTOR</b>	Locking barrel	Compression terminal block	Pigtail AC power cord
<b>DC POWER CORD*</b>	Available upon request	N/A	N/A
<b>AC POWER SUPPLY*</b>	12 VDC power supply for 0° C to 40° C (32° F to 104° F) included; Extended temperature power supply available separately	N/A	Internal
<b>BATTERY BACKUP</b>	N/A		

## PHYSICAL

<b>DIMENSIONS (L X W X H)</b>	5.25 in x 3.35 in x 1.00 in (13.33 cm x 8.50 cm x 2.54 cm)	9.50 in x 6.25 in x 3.75 in (240 mm x 160 mm x 95 mm)	
<b>WEIGHT</b>	0.44 lb (0.20 kg)	3.10 lb (1.41 kg)	
<b>STATUS LEDS</b>	Ethernet status, Power, Cellular link/activity, Signal strength (4 bars), Digi XBee link/activity	Ethernet status, Power, Cellular link/activity, Signal strength (5 bars), Digi XBee® link/activity	
<b>ENCLOSURE MATERIAL</b>	Industrial (metal)	NEMA 4X	
<b>ENCLOSURE RATING</b>	N/A	IP66	
<b>MOUNTING</b>	Wall-mount bracket sold separately	DIN rail bracket included	4x mounting feet on the unit's flange

## ENVIRONMENTAL

<b>OPERATING TEMPERATURE ***</b>	-30° C to +75° C (-22 F to +167 F)		
<b>STORAGE TEMPERATURE</b>	-40 to +85C		
<b>RELATIVE HUMIDITY</b>	5% to 95% (non-condensing)	N/A (enclosure is water-tight)	
<b>ETHERNET ISOLATION</b>	1500 VAC min per IEEE 802.3/ANSI X3.263		
<b>SERIAL PORT PROTECTION (ESD)</b>	+15 kV Air Gap and +8 kV contact discharge per IEC 1000-4-2		
<b>HAZARDOUS (CLASS 1 DIV 2)</b>	No	Yes	No

## APPROVALS

<b>GSM/UMTS</b>	PTCRB, NAPRD.03, GCF-CC, R&TTE, EN 301 511
<b>CDMA/EV-DO</b>	CDG, TIA/EIA-690, TIA/EIA-98-E
<b>CELLULAR CARRIERS</b>	Certified by most major carriers. See <a href="http://www.digi.com">www.digi.com</a> for current listing.
<b>SAFETY</b>	UL 60950, CSA 22.2 No. 60950, EN60950; Class 1 Div 2 (IA model only)
<b>EMISSIONS/IMMUNITY</b>	CE, FCC Part 15 (Class A), AS/NZS CISPR 22, EN55024, EN55022, Class A

## WARRANTY

<b>PRODUCT WARRANTY</b>	5 years
-------------------------	---------

\* Optional hardware

\*\* Transfer rates are network operator dependent

\*\*\* Reduced cellular performance may occur above +60° C. Standard Temperature power supplies may reduce temperature range.

PART NUMBERS	DESCRIPTION
<b>ConnectPort X4 H - ZIGBEE</b>	
X4H-Z1U-L301-US	ConnectPort X4H - Digi XBee ZigBee to Ethernet & Cellular (LTE)
X4H-Z1U-U901-US	ConnectPort X4 H - Digi XBee ZigBee S2B to Ethernet & Cellular (HSPA+)
X4H-Z1U-B101-US	ConnectPort X4 H - Digi XBee ZigBee S2B to Ethernet & Cellular (1xRTT Sprint)
<b>ConnectPort X4 H - 900 MHZ</b>	
X4H-HMU-U901-US	ConnectPort X4 H - Digi XBee (Digi XBee-PRO 900HP) to Ethernet & Cellular (HSPA+)
X4-HMU-U901-US	ConnectPort X4-Digi XBee (Digi XBee-PRO 900HP) to Ethernet & Cellular (HSPA+)
<b>ConnectPort X4 - ZigBee</b>	
X4-Z11-E-A	ConnectPort X4 - Digi XBee ZigBee to Ethernet
X4-Z11-E-W	ConnectPort X4 - Digi XBee ZigBee to Ethernet (International)
X4-Z1J-U901-W	ConnectPort X4 - Digi XBee ZigBee to Ethernet & Cellular (HSPA+) (International)
X4-Z1U-U901-A	ConnectPort X4 - Digi XBee ZigBee to Ethernet & Cellular (HSPA+)
<b>ConnectPort X4 - DigiMesh 2.4 GHZ</b>	
X4-M11-U901-A	ConnectPort X4-Digi XBee (Digi Mesh 2.4GHS) to Ethernet & Cellular (HSPA+)
X4-M11-U901-W	ConnectPort X4 - Digi XBee (DigiMesh 2.4 GHz) to Ethernet & Cellular (HSPA+) (International)
<b>ConnectPort X4 - 900 MHZ</b>	
X4-HMU-B201-A	ConnectPort X4 - Digi XBee (Digi XBee-PRO 900HP) to Ethernet & Cellular (1xRTT Verizon)
X4-HMU-E-A	ConnectPort X4 - Digi XBee (Digi XBee-PRO 900HP) to Ethernet
X4-HMU-U901-A	ConnectPort X4 - Digi XBee (Digi XBee-PRO 900HP) to Ethernet & Cellular (HSPA+)
<b>ConnectPort X4 IA - ZigBee</b>	
X4-Z1J-U905	ConnectPort X4 IA - Digi XBee ZigBee to Ethernet & Cellular (HSPA+) (International)
X4-Z1U-B205	ConnectPort X4 IA - Digi XBee ZigBee to Ethernet & Cellular (1xRTT Verizon)
X4-Z1U-U905	ConnectPort X4 IA - Digi XBee ZigBee to Ethernet & Cellular (HSPA+)
<b>ConnectPort X4 IA - 802.15.4</b>	
X4-A1J-U905	ConnectPort X4 IA - Digi XBee (802.15.4) to Ethernet & Cellular (HSPA+) (International)
X4-A1U-U905	ConnectPort X4 IA - Digi XBee (802.15.4) to Ethernet & Cellular (HSPA+)
<b>ConnectPort X4 IA - 868 MHZ</b>	
X4-P8J-U905	ConnectPort X4 IA - Digi XBee (868 MHz) to Ethernet & Cellular (HSPA+)

DIGI SERVICE AND SUPPORT / You can purchase with confidence knowing that Digi is always available to serve you with expert technical support and our industry leading warranty. For detailed information visit [www.digi.com/support](http://www.digi.com/support).

© 1996-2017 Digi International Inc. All rights reserved.  
All trademarks are the property of their respective owners.

91001460  
E5/717

DIGI INTERNATIONAL WORLDWIDE HQ  
877-912-3444 / 952-912-3444 / [www.digi.com](http://www.digi.com)

DIGI INTERNATIONAL GERMANY  
+49-89-540-428-0

DIGI INTERNATIONAL JAPAN  
+81-3-5428-0261 / [www.digi-intl.co.jp](http://www.digi-intl.co.jp)

DIGI INTERNATIONAL SINGAPORE  
+65-6213-5380

DIGI INTERNATIONAL CHINA  
+86-21-50492199 / [www.digi.com.cn](http://www.digi.com.cn)

